


Setup Customisation

The MTT Suspension fork can be customized with three different springs at our retailers using a dedicated tool:

| | HARD | MEDIUM | SOFT |
|-----------|---------|---------|-------|
| STIFFNESS | 21.5 Nm | 16.5 Nm | 12 Nm |
| COLOR | RED | BLACK | WHITE |

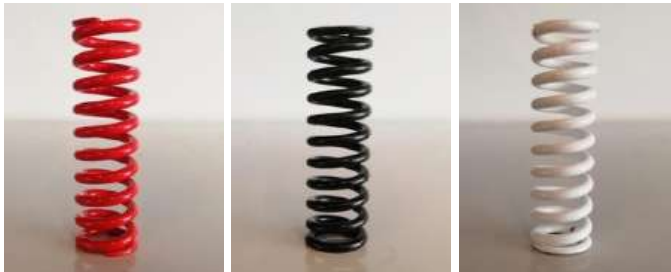

Preload can also be adjusted using dedicated spacers, in order to tune the fork SAG:

| | HIGH | MEDIUM | LOW |
|---------|------|--------|-------|
| PRELOAD | 6mm | 3mm | 1mm |
| COLOR | RED | BLACK | WHITE |





| | EASY GRAVEL | MIXED TERRAIN | ROUGH GRAVEL - TRAIL |
|--|-------------|---------------|----------------------------|
|--|-------------|---------------|----------------------------|

| | | | | |
|--------------------------|---------|-------------------------------|------------------------------|----------------------------------|
| RIDER WEIGHT 60-70 Kg | SPRING | Soft Spring WHITE - 12 Nm | Soft Spring WHITE - 12 Nm | Medium Spring BLACK - 16.5 Nm |
| | PRELOAD | Medium Spacer BLACK - 3 mm | High Spacer RED - 6 mm | Medium Spacer BLACK - 3 mm |

| | | | | |
|--------------------------|---------|------------------------------|----------------------------------|------------------------------|
| RIDER WEIGHT 70-80 Kg | SPRING | Soft Spring WHITE - 12 Nm | Medium Spring BLACK - 16.5 Nm | Hard Spring RED - 21.5 Nm |
| | PRELOAD | High Spacer RED - 6 mm | Low Spacer WHITE - 1 mm | Low Spacer WHITE - 1 mm |

| | | | | |
|--------------------------|---------|----------------------------------|----------------------------------|-------------------------------|
| RIDER WEIGHT 80-90 Kg | SPRING | Medium Spring BLACK - 16.5 Nm | Medium Spring BLACK - 16.5 Nm | Hard Spring RED - 21.5 Nm |
| | PRELOAD | Low Spacer WHITE - 1 mm | Medium Spacer BLACK - 3 mm | Medium Spacer BLACK - 3 mm |

| | | | | |
|------------------------|---------|-------------------------------|------------------------------|------------------------------|
| RIDER WEIGHT >90 Kg | SPRING | Hard Spring RED - 21.5 Nm | Hard Spring RED - 21.5 Nm | Hard Spring RED - 21.5 Nm |
| | PRELOAD | Medium Spacer BLACK - 3 mm | High Spacer RED - 6 mm | High Spacer RED - 6 mm |

The setup chart is a recommendation. Users can tune their setup with any spring and preload combination.